ORDERING GUIDE - AFTERMARKET

USA
SAF-HOLLAND, Inc.
800-876-3929

CANADA
SAF-HOLLAND, Canada Ltd.
519-537-2366

CBXA40, CBX46 AND CBX50 Tandem Slide Suspension with Drum or Disc Brake Axle and CBX69 Tridem Slide Suspensions with Drum or Disc Brake Axle

Ordering Guide Information: PLEASE DOWNLOAD THIS FORM BEFORE COMPLETING.

This form is designed to collect all necessary information about the suspension application requirements to help determine the appropriate CBXA40, CBX46, CBX50 or CBX69 Series configuration for the trailer build.

For application and selection information, please reference our SAF Trailer Air & Spring Ride Suspension Application Guide (XL-MP20033SG-en-US).

If you have any questions regarding this document, please feel free to contact SAF-HOLLAND Customer Service. US Customers: 1-800-876-3929 Canada: 519-537-3494

- Please complete all of the information requested on this ordering guide by filling in all appropriate fields.
- After submitting, print a copy of this ordering guide for your records,by click ing the "PRINT FORM" button.
- To clear the form, click the "CLEAR FORM" button.

How-To Submit This Ordering Guide:
Submit completed ordering guide by clicking the "EMAIL" button next one of our SAF-HOLLAND ordering specialist.

SUBMIT FORM TO:

USA
EMAIL

CANADA
EMAIL

PRINT FORM CLEAR FORM

GENERAL INFORMATION

CUSTOMER INFORMATION - AUTHORIZED RETAILER

Date: | Estimated Trailers for this Specification:
Company Name: | Contact Name:
Street Address:
City: | State/Province: | Zip Code/Postal Code:
Telephone: | Fax: | E-Mail:

END USER INFORMATION

Company Name: | Contact Name:
Street Address:
City: | State/Providence: | Zip Code/Postal Code:
Telephone: | Fax: | E-Mail:

DRUM BRAKE AXLE CONFIGURATION (Complete Drum or Disc Brake Section as Required)

FIXED PORTION OF CONFIGURATION

Drum Brake

Brake Shoe/Lining: SAF Standard Extended Life Linings

Axle Rating: 20,000 - CBXA40 (2 axles)
23,000 - CBX46 (2 axles), CBX69 (3 axles)
25,000 - CBX50 (2 axles)

Tire Inflation System: 1-Hole, Drilled and Tapped with Freeze Plugs

S-Cam: 28 Spline Standard, Medium Length

Brake Size 16.5" X 7"

OPTIONAL PORTION OF CONFIGURATION

Spindle: ◯ Tapered ◯ Parallel

Dual/Wide Base Single: ◯ Dual ◯ Wide Base Single*
*Note: 2" outset not approved for tapered axles.
(See XL-AA20005WI-en-US for axle derating.)

Brake Size: ◯ 16.5" x 7"

Axle Track/Frame Width/Beam Centers: ◯ 71.5"/42"/36" ◯ 77.5"/48"/42"

XL-AM20001OG-en-US Rev I 2026-10-07 · Amendments and Errors Reserved · © SAF-HOLLAND, Inc., SAF-HOLLAND, HOLLAND, SAF, and logos are trademarks of SAF-HOLLAND S.A., SAF-HOLLAND GmbH, and SAF-HOLLAND, Inc.

ORDERING GUIDE - AFTERMARKET

CBXA40, CBX46 AND CBX50 Tandem Slide Suspension with Drum or Disc Brake Axle and CBX69 Tridem Slide Suspensions with Drum or Disc Brake Axle

Wheel Ends Required: ◯ Yes ◯ No If no, skip section and continue to Slider/Suspension Configuration.

DRUM BRAKE WHEEL END CONFIGURATION

FIXED PORTION OF CONFIGURATION

- Hub Material: Ductile Iron
- Autom. Slack Adjuster: Standard 5.5"
- Spindle Nut: ZipTorq®
- Drum Material: Cast
- Bearing: Standard
- Wheel Fasteners: 2 Ship Nuts
- Hubcap Type: Standard Bolt-On
- Brake Chamber: Standard 30/30, 2.5" Stroke
- Hub Style: Hub Piloted
- Seal: Standard Spindle Mount
- Stud Length: Long

OPTIONAL PORTION OF CONFIGURATION

Lube Type: ◯ Synthetic Oil ◯ Semi-Fluid Grease

OPTIONS SOLD SEPARATELY

ABS Sensor (400 mm Lead Length): ◯ Yes ◯ No
Order Part No. 1022300000020
Specify Quantity Needed: 2 4 6

Wheel Fasteners: (Flange Nut, M22 x 1.5)
☐ Order Part No. 04247301201 (20 Needed Per Axle) (Specify Quantity Required) ☐

Dust Shields: (Dust Shield Kit) ☐ Order Part No. 03005023500Z, Quantity 4 (CBX40/46/50) Quantity 6 (CBX69)

DISC BRAKE AXLE CONFIGURATION - P89 & P89 PLUS (Complete Disc Brake or Drum Brake Section as Required)

FIXED PORTION OF CONFIGURATION

- Disc Brake - 22.5"
- Axle Rating: 20,000 - CBXA40 (2 axles)
  23,000 - CBX46 (2 axles), CBX69 (3 axles)
  25,000 - CBX50 (2 axles)
- Fixed Portion: Parallel Spindle
- Tire Inflation System: 1-Hole, Drilled and Tapped with Freeze Plugs
- ABS Sensor: (400 mm Lead Length) Installed on all axles.
- Note: All disc brake axles come with wheel end components.

OPTIONAL PORTION OF CONFIGURATION

☐ P89 - 5 Year Warranty ☐ P89 PSP7 - 7 Year Warranty

Options Lube Type: ◯ Synthetic Oil ◯ Semi-Fluid Grease

☐ P89 Plus - 7 Year Warranty *Only available with SAF sealed bearing and parallel spindle.

Dual/Wide Base Single: ◯ Dual ◯ Wide Base Single

Axle Track/Frame Width/Beam Centers: ◯ 71.5"/42"/36" ◯ 77.5"/48"/42"*

OPTIONS SOLD SEPARATELY

Wheel Fasteners: (Flange Nut, M22 x 1.5)
☐ Order Part No. 04247301201 (20 Needed Per Axle) (Specify Quantity Required) ☐

Dust Shields: (Dust Shield Kit) ☐ Order Part No. 1022300000040, Quantity 4 (CBXA40/46/50) Quantity 6 (CBX69)

XL-AM20001OG-en-US Rev I 2026-10-07 · Amendments and Errors Reserved · © SAF-HOLLAND, Inc., SAF-HOLLAND, HOLLAND, SAF, and logos are trademarks of SAF-HOLLAND S.A., SAF-HOLLAND GmbH, and SAF-HOLLAND, Inc.

ORDERING GUIDE - AFTERMARKET

CBXA40, CBX46 AND CBX50 Tandem Slide Suspension with Drum or Disc Brake Axle and CBX69 Tridem Slide Suspensions with Drum or Disc Brake Axle

SLIDER/SUSPENSION CONFIGURATION

FIXED PORTION OF CONFIGURATION

Slider Pin Extractor: Air Release

PosiLok™: Walk/Drop Solutions

Air Control Kit: HCV with Integral Dump 3/8" Low Flow

Fixed Configuration: Box Height: 8"


OPTIONAL PORTION OF CONFIGURATION


Slider Model: ◯ CBX 46 (Tandem) ◯ CBXA40 (Tandem) ◯ CBX50 (Tandem) ◯ CBX69 (Tridem)

Ride Height: ◯ 16" ◯ 16.5" ◯ 17"

Frame Width: See Axle Portion of Configuration


Body Rail Style: ◯ 1.375" x 6" (Binkley Style) Outside Shim
◯ 1.375" x 6" (Binkley Style) Inside Shim
◯ 1.625" x 4" (Hutch™ Style) Outside Shim





CBX69 Axle Spread: ◯ 60" ◯ 72"
CBXA40, CBX46, CBX50 Axle Spread: 49"

BRACKET CONFIGURATION

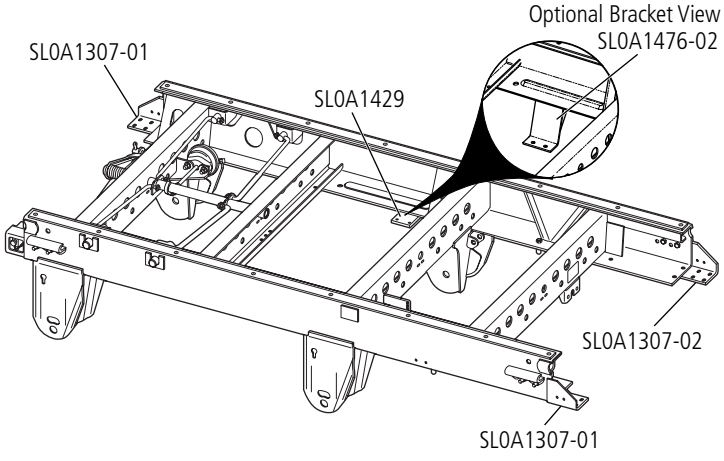

OPTIONS SOLD SEPARATELY

Shock Straps: ◯ Yes ◯ No

Order Part No. 90549928 (For 16" Ride Height) — Quantity 4 (CBXA40/46)

Order Part No. 90549920 (For 16.5" and 17" Ride Height) — Quantity 4 (CBXA40/46)

Order Part No. 90549937 (For 16", 16.5" and 17" Ride Height) — Quantity 4 (CBX50) Quantity 6 (CBX69)

Mud Flap Brackets: ☐ Order Part No. SL0A1307-01, Quantity 1 and SL0A1307-02, Quantity 1

Stinger Bracket: ☐ Order Part No. SL0A1307-01, Quantity 1

Air Tank Brackets: ☐ Order Part No. SL0A1429, Quantity 2

Optional 6.25" Drop Brackets:


☐ Order Part No. SL0A1476-02, Quantity 2

XL-AM20001OG-en-US Rev I 2026-10-07 · Amendments and Errors Reserved · © SAF-HOLLAND, Inc., SAF-HOLLAND, HOLLAND, SAF, and logos are trademarks of SAF-HOLLAND S.A., SAF-HOLLAND GmbH, and SAF-HOLLAND, Inc.

CBXA40, CBX46 AND CBX50 Tandem Slide Suspension with Drum or Disc Axle Brake and CBX69 Tridem Slide Suspensions with Drum or Disc Brake Axle

DIMENSIONAL VIEWS

CBXA40 CBX46 AND CBX50 WITH DRUM BRAKE AXLES SHOWN
All Dimensions Are Reference

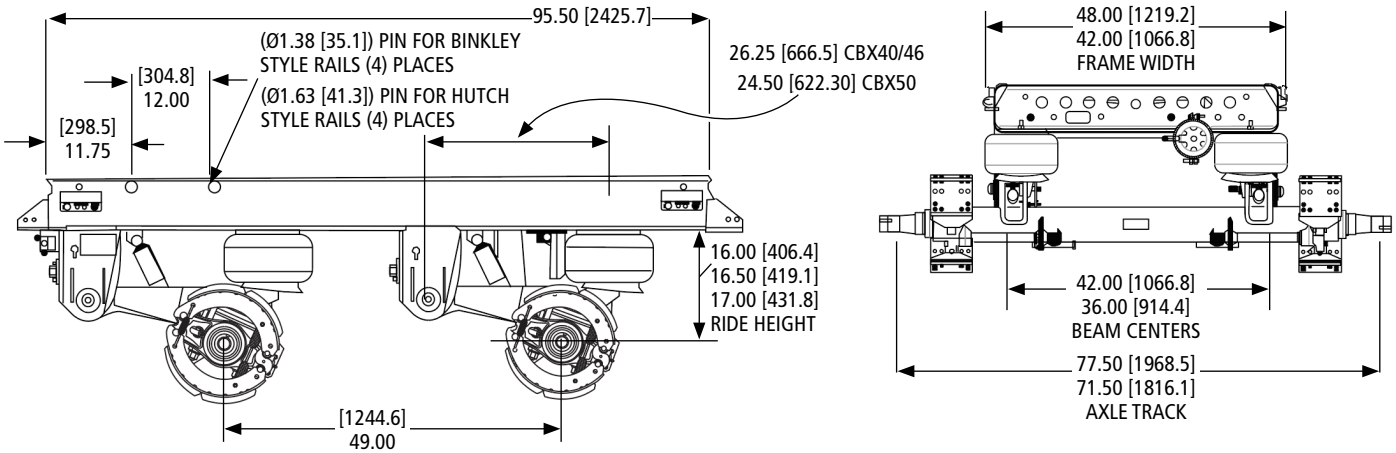

CBX69 WITH P39 OR P39 PLUS DISC BRAKE AXLE SHOWN

ALL DIMENSIONS ARE REFERENCE

