

UltraLite40 and ULX40


Instructions

Please complete all applicable sections of this ordering guide to ensure accurate configuration and processing. For additional assistance, please contact customer service at 1.800.876.3929 in the US and 1.519.537.2366 in Canada. Once completed, please email this form to your account manager or the followings:

- for OEM Customer Service send to sales@safholland.com.
- for Aftermarket Customer Service send to AftermarketProductGroup@safholland.com.
- for Canada Customer Service send to SAFCanadaOrders@safholland.com.

Section 1: Customer Information

Date		Customer Type	☐ OEM	☐ Aftermarket
Fleet Name		Annual Volume		
Contact Name		Company Name		
Phone		Email		

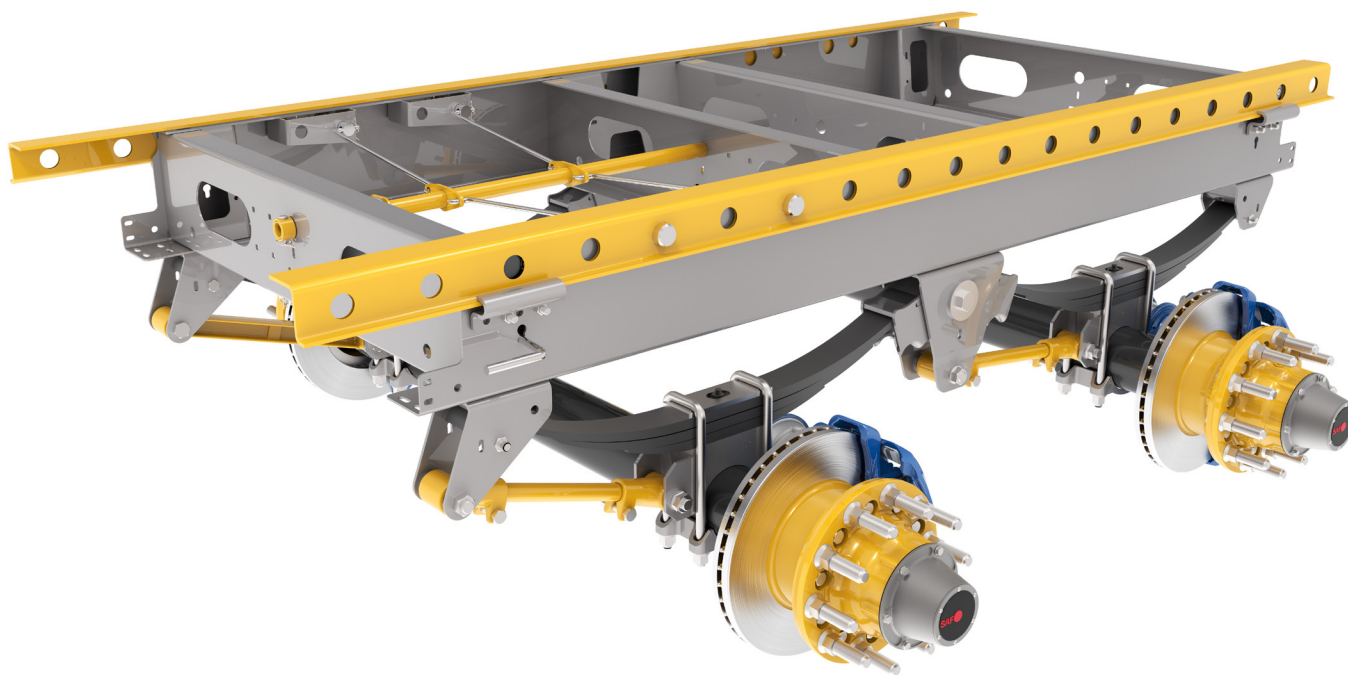

Mechanical Suspension Ordering Guide




UltraLite40 and ULX40

Section 2: Slide Box (UltraLite40)

FIXED	Axle Arrangement	Tandem
	Axle Spacing	49"
	Box Weight	48"
	Box Height	10"
	Pin Spacing	12"
	Coating	Galvanized

OPTIONS	Pin Type	☐ Binkley (Ø1.38")	☐ Hutch (Ø1.63")
	Shim Location	☐ Inside	☐ Outside
	Release Mechanism	☐ QwikRelease (Manual)	☐ Air Release / Ramp Ready
	Air Tank Bracket	☐ Center	☐ None
	Mudflap Adapter	☐ Yes	☐ No

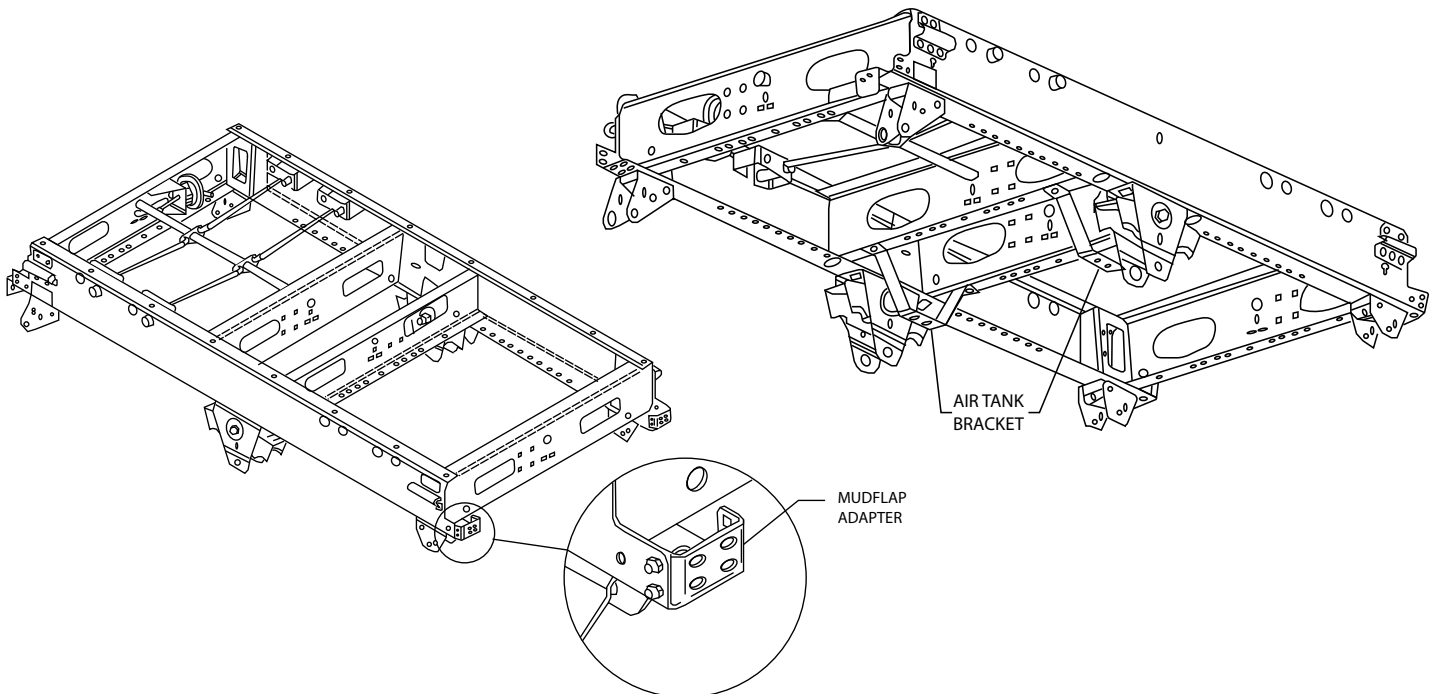

Are You Ordering A Suspension System With Axles (ULX40)?


☐ YES (Continue to Section 3 Next Page) ☐ NO (Stop Here)

UltraLite40 and ULX40

Section 3: ULX40 Suspension System

FIXED	Axle Diameter	5"
	Sprindle	Parallel
	Tire Inflation Prep	Single Hole - Drilled, Tapped, and Plugged
	Axle Style	Straight
	Axle Track	77.5"
	Spring Centers	44"
	Axle Capacity	20,000 lb

OPTIONS	Leaf Spring	363 Low Arch Single-Leaf
	Ride Height	12.75
	Spring Seat	*Function of spring and ride height (See image below)

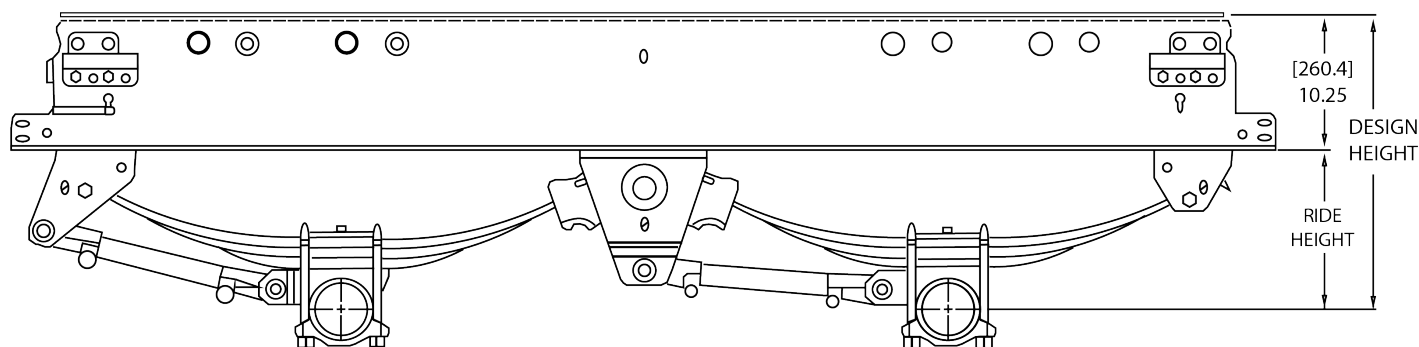

Are You Ordering With Disc Brakes?

☐ YES (Continue to Section 3.1 next page) ☐ NO (Continue to Section 3.2)

Mechanical Suspension Ordering Guide



UltraLite40 and ULX40

Section 3.1: Disc Brakes

FIXED	Caliper	Haldex ModulT
	Brake Chamber	Haldex 16/24 LifeSeal+™
	Brake Rating	20,000 lb
	Rotor Size	430 mm
	Dust Shields	Included

Section 3.1.1: Disc Brake Wheel End Packages


	☐ PSP5	☐ PSP5 LW	☐ PSP7	☐ PSP7 LW
Warranty	5-Year		7-Year	
Hub	ConMet PreSet			
Hub Material	Iron	Aluminum	Iron	Aluminum
Hub Style	Hub piloted, 10 stud, 11.25" Bolt Circle for 22.5" and 24.5" rims			
ABS Tone Ring	Included			
Bearing	ConMet			
Spindle Nut	SAF Standard		ConMet	
Wheel Seal	ConMet			
Rotor Type	U-Shape	Flat	U-Shape	Flat
Hubcap	Standard Bolt-on			
Lube Type	☐ Semi-fluid Synthetic Grease		☐ 75/90 Synthetic Oil	
Wheel Material	☐ Steel	☐ Aluminum	☐ Steel/Aluminum	
Rim Configuration	☐ Dual		☐ Wide Base Single (WBS)	
Tire Brand/Size	_____ (please specify)			
Stud Length	☐ Short		☐ Long	
ABS Sensor	☐ Haldex ☐ Wabco ☐ None			
	☐ Other _____			
	☐ 2S/1M		☐ 4S/2M	
Wheel Nuts	☐ No		☐ Yes (Shipped Loose)	
Tire Inflation	☐ Tire Pilot Plus (See Section 4)		☐ PSI (MTIS)	☐ None

UltraLite40 and ULX40

Section 3.2: Drum Brakes

FIXED	S-Cam	28 Spline
	Cam Location	Rearward
	Cam Length	Short

OPTIONS	Brake Rating	☐ 20,000 lb	☐ 23,000 lb
	Brake Lining	☐ SAF Extended Service	☐ SAF Extended Service - Smart Steel (20k/8.63" Only)
	Brake Size	☐ 16.5x7"	☐ 16.5x8.63"
	Cam Enclosure	☐ No	☐ Yes
	Tire Inflation	☐ Tire Pilot Plus	☐ PSI (MTIS) ☐ None

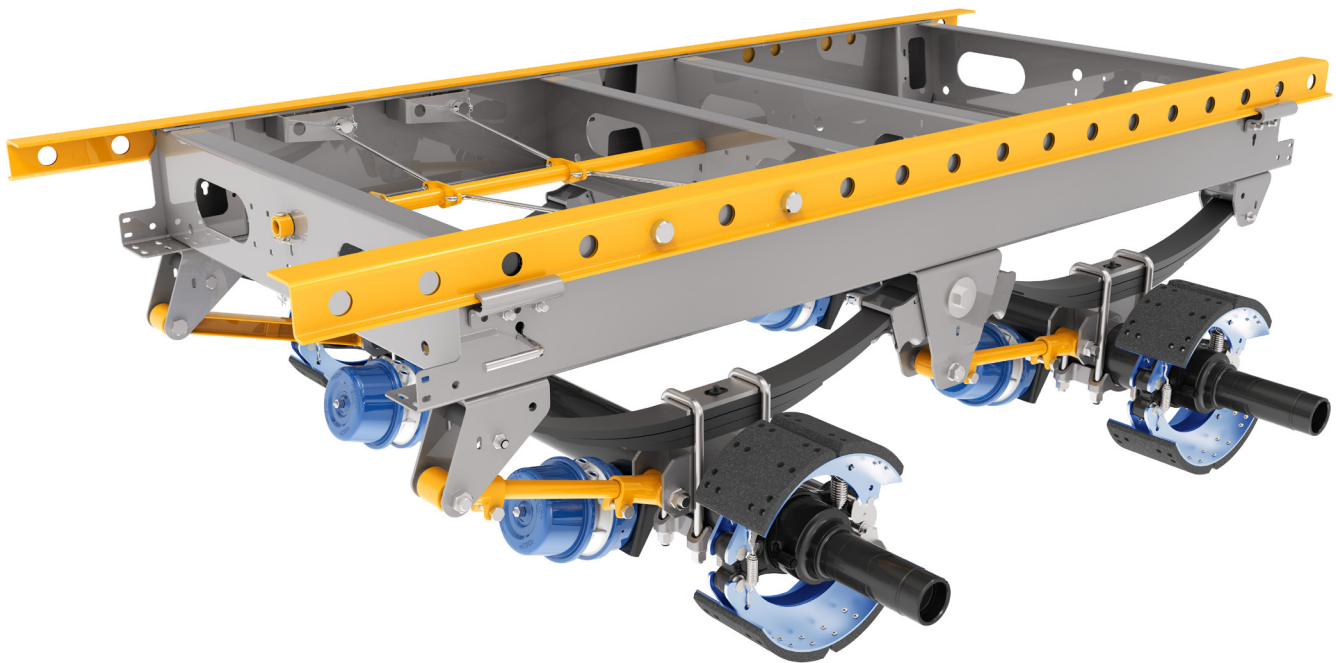

Are you Ordering Fully Dressed Brake Axle?

☐ YES (Continue to Section 3.2.1 next page) ☐ NO (Stop Here)

Mechanical Suspension Ordering Guide



UltraLite40 and ULX40

Section 3.2.1: Drum Brake Wheel End Packages

	☐ SC5	☐ PSP5	☐ PSP7	☐ PSP7 LW
Warranty	5-Year		7-Year	
Hub	SAF Standard	ConMet PreSet		
Hub Material	Standard	Iron	Iron	Aluminum
Hub Style	Hub piloted, 10 stud, 11.25" Bolt Circle			
ABS Tone Ring	Included			
Bearing	SAF Standard	ConMet		
Spindle Nut	SAF Standard	ConMet		
Wheel Seal	SAF Standard	ConMet		
Drum Type	SAF Standard			CentriFuse
Slack Adjuster	Haldex 5.5" S-ABA			
Brake Chamber	Haldex 30/30 GoldSeal+™		Haldex 30/30 LifeSeal+™	
Hubcap	Standard Bolt-on			
Lube Type	☐ Semi-fluid Synthetic Grease		☐ 75/90 Synthetic Oil	
Wheel Material	☐ Steel	☐ Aluminum	☐ Steel/Aluminum	
Rim Configuration	☐ Dual		☐ Wide Base Single (WBS)	
Tire Brand/Size	_____ (please specify)			
Stud Length	☐ Short		☐ Long	
Dust Shields	☐ Yes		☐ No	
ABS Sensor	☐ Haldex ☐ Wabco ☐ None			
	☐ Other _____			
	☐ 2S/1M		☐ 4S/2M	
Wheel Nuts	☐ No (Ship Nuts Only)		☐ Yes (Shipped Loose)	
Tire Inflation	☐ Tire Pilot Plus (See Section 4)		☐ PSI (MTIS)	☐ None

UltraLite40 and ULX40

Section 4: Tire Pilot Plus

FIXED	Number of axles	2 Axles
	Hubcap	TPP Standard
	Tire Hoses	Stainless Braided, Dual Check-port
	Controller	Standard Electrical

OPTIONS	Light Kit	☐ Yes ☐ No
	Electrical Harness	☐ Yes ☐ No
	Pressure Setting	☐ 85 ☐ 90 ☐ 95 ☐ 100 ☐ 105 ☐ 110 ☐ 115 ☐ 120

